

6CXBΜ-GT

M-rating 294kW [400mhp] / H-rating 265kW [360mhp]



Photograph may show optional equipment.


Engine Specifications

Model	6CXBM-GT	
Type	4-cycle, Vertical, Turbo-charged diesel engine	
No. of cylinders	6 in-line	
Bore × stroke	mm	110 × 130
Displacement	lit.	7.413
Ratedoutput	kW(hp)/rpm	M:294 (400) / 2500
Fuel consumption	gr/kW·hr	H:265 (360) / 2400
Direction of rotation	Counterclockwise viewed from stern (crankshaft)	
Combustion system	Direct injection	
Cooling system	With Heat exchanger	
Lubricating system	Forced lubrication with gear pump	
Starting system	Electric starting motor (DC 24V-5kW)	
Dry weight	kg	856

Marine Gear Specifications


Engine Model	6CXBM-GT					
Marine gear model	YX-75			YXH2-130 (2 speed type)		
Type	Hydraulic multi-disc clutch, wet type					
Reduction ratio	2.07	2.58	2.91	2.03 / 2.62	2.57 / 3.35	3.04 / 4.00
Direction of rotation	Clockwise or Counter-clockwise viewed from stern			Counter-clockwise viewed from stern		
Dry weight	kg	204			320	

Dimensions (Unit : mm)

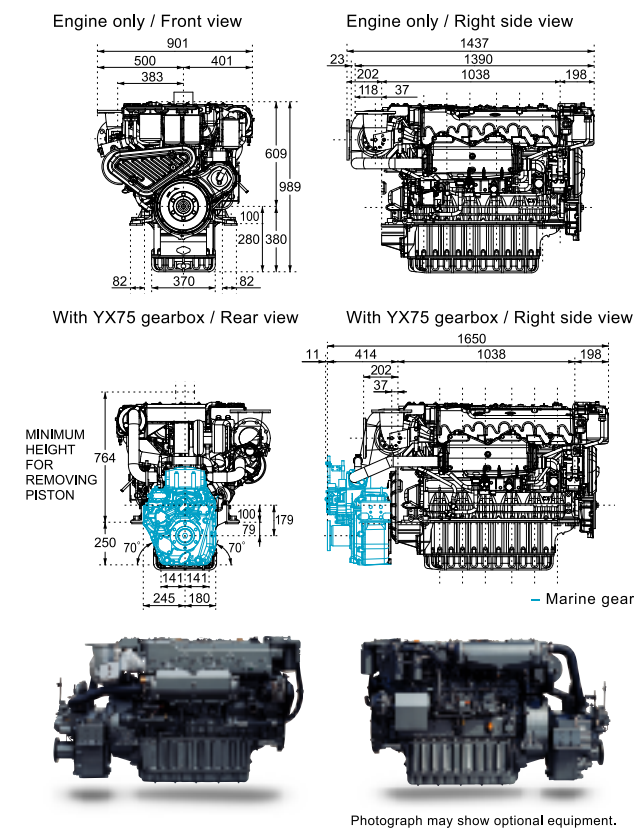

Photograph may show optional equipment.

Performance Curves

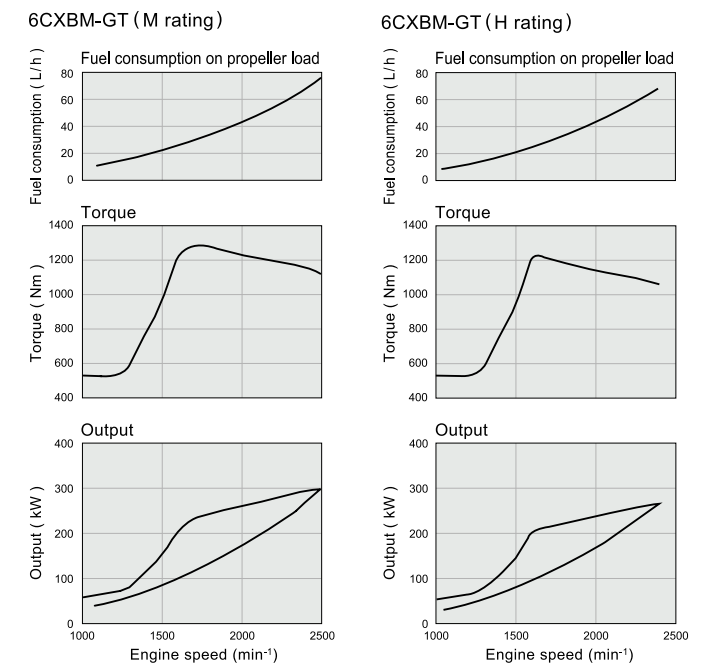

Note : All data subject to change without notice.

YANMAR CO., LTD.

Marine Operations Division.

5-3-1, Tsukaguchi Honmachi Amagasaki, Hyogo, Japan

Tel : +81-6-6428-3120 Fax : +81-6-6421-2202

www.yanmar.co.jp/en

For Harmonious Living with Global Environment

**YANMAR
ECOLOGY**

IMO Tier II Compliant

Lower fuel consumption
Lower NOx emissios

Doing Our Bit for the World!

lower fuel
consumption

and

lower NOx
emissions

At the Same Time

Normally, when NOx emissions are reduced, the fuel consumption and smoke generation will increase, adversely affecting both the environment and management. As a solution to this, YANMAR has developed "Eco Diesel", which is designed so as to comply with marine environmental protection. It improves the fuel consumption and smoke generation in addition to reducing NOx emissions.



Powerful and Friendly to People and Environment!

Performance

400hp (294kW) at 2500rpm in the M operating mode /

360hp (265kW) at 2400rpm in the H operating mode

This 130 mm long stroker 7.4 liter class diesel, with big breathing valves for better airflow, the high performance turbo for compactness, less turbo lag, and better mixing at low revs, the all-new high efficiency intercooler for cooler, more compact air charging, and the numerous other performance features deliver power in large amounts over a wide operating range, especially under high load conditions.

Good Fuel Economy together with Lower Emissions


The micro-sized multiple holes in the all-new injectors produce an even finer fuel-oil mist and, combined with new perfectly matched combustion chambers and new cylinder head shapes, produce even more power. It is power delivered smoothly, due to optimum combustion conditions being maintained across a far wider operating range. And it leads directly to the bonus of lower exhaust emissions and lower fuel consumption. The boost compensator dramatically reduces black smoke under hard acceleration.

High Torque

Excellent Torque-Rise Characteristics in High Speed and High Load Range Enable Stable Performance of Job Duties even at High Load

**The Engine Performance Gives Following Advantages:
Stable performance for a wider range**

1. Min. Fuel Consumption Range is Wide, (Line A of right figure)
2. The Engine Torque-rise Characteristics Having Much in Reserve, (Line B of right figure)
3. Wide max. power range. (Line C of right figure)
→ A wide range propeller matching.

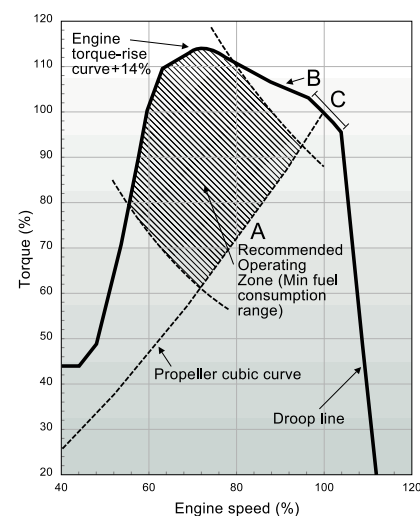

This figure indicate in case of 6CXBM-GT


Toughness

1. Designed for marine use.
2. Type Approved by Class Societies.
3. Low, stable LOC (Lubricating Oil Consumption) and long overhaul interval.
4. Tufftride treatment cylinder liner and nitrided stainless steel rings and the finely judged clearance between piston and liner.
5. Special treatment injection nozzle.

Safety


Easier Routine Inspection, Easier Maintenance.

Large inspection windows on the side of the block allow in-site replacement of pistons. Lube Oil filter is easy-to-replace cartridge type. Full mechanical engine management avoids the chance of delicate and expensive electronics failing in hot, marine engine room conditions. Maintenance is simplified, inspection and replacement costs are lower. Reliability and durability are enhanced. Engine is user-friendly.



High capacity front PTO

If makes various applications possible. for your professional activities on the sea.

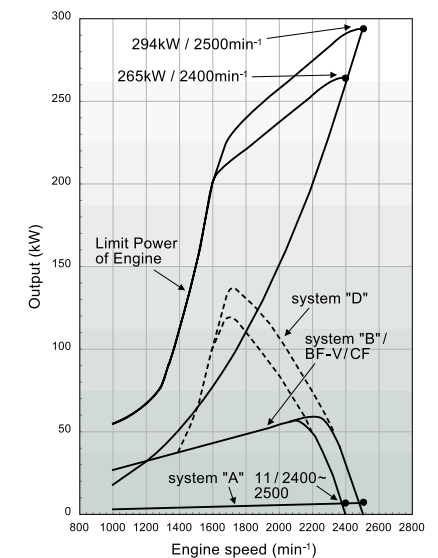

YANMAR original marine gear that can be adapted to a wide range of applications

YANMAR provides our original gearbox, which enables us to supply total marine engineering & servicing to customers!

High-Performance Marine Gear

YANMAR's original marine gear is designed to draw out best performance of YANMAR engines.

Easier Maintenance

The 3-part structure of the case enables the forward shaft and reverse shaft to be disassembled and reassembled while still installed on the boat. In addition, a cartridge system is now used for the L.O. filter.

Large Capacity & Long Service Life

A fiber friction plate delivers improved trolling performance and increased clutch capacity. In addition, a finer LO filter extends the service life of the bearings and moving parts.

Damping of Fluctuating Torque

High-performance coupling reduces the fluctuating torque that is input to the marine gear. They reduce rattling and prevent torsional vibration to protect the power transmission parts.

